

# מפרט טכני

# PA-LS-75



**METALPRESS**


MAKE THE DIFFERENCE



## מפרט טכני



PA-LS-75/750	PA-LS-75/500	PA-LS-75/300	PA-LS-75/200	דגם
24 V DC +/- 15%				מתח עבודה
1.1 A				זרם נומינלי
750 N				כח פתיחה
750 מ"מ	500 מ"מ	300 מ"מ	200 מ"מ	מהלך פתיחה
עשוי מסיליקון SICO PLUG connection				כבל חשמלי
3 ק"ג	2.5 ק"ג	2.1 ק"ג	1.9 ק"ג	משקל משוערך
7.6 מ"מ בשניה				מהירות פתיחה
IP 54				חוזק מכני
1100X36X42mm	835X36X42mm	635X36X42mm	535X36X42mm	מידות (אורך, עומק, גובה)
300°C עד 30 דקות				עמידות אש
מעל 10,000 פתיחות וסגירות				מחזוריות
אלומיניום				גוון



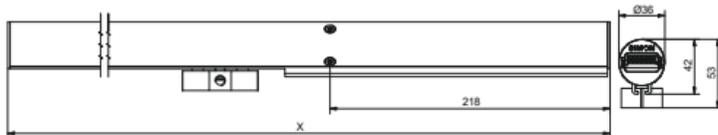

**Table 1: Total lengths**

Stroke	Total length X
181 mm	535 mm
281 mm	635 mm
481 mm	835 mm
731 mm	1100 mm

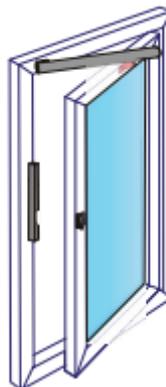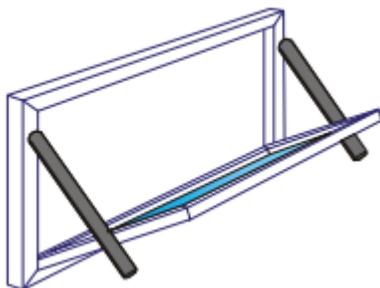

# UK CA

## Declaration of Conformity

in accordance with UK government guidance

This declaration is valid for following products:

<b>Device Type:</b>	Linear actuator
<b>Type</b>	PA-L-xx-xxx(-S), PA-LS(A)-xx-xxx(-S)

Hereby it is confirmed that the products correspond to the substantial protection requirements, which are fixed in the guidelines of the advice for the adjustment of the legislation of the member states over the Electromagnetic Compatibility Regulations 2016, the Supply of Machinery (Safety) Regulations 2008 and the Electrical Equipment (Safety) Regulations 2016.

This declaration was given by:  
**SIMON PROtec Systems GmbH**  
Medienstraße 8  
94036 Passau, Germany

For the evaluation of the products regarding the electromagnetic compatibility as well as the low-voltage guideline the following standards were consulted:

BS EN 61326-1: 2013-07 general requirements  
BS EN 61010-1: 2011-07

Passau, 31<sup>th</sup> August 2023  
(Place / Date)

  
(Legal signature of the manufacturer)